

PRODUCT SPECIFICATION


Two-in-One Video Processor

HD-VP620A

1. System Overview

HD-VP 620A is a two-in-one video processor that integrates a traditional video processor and 6-way Gigabit Ethernet output. It not only simplifies the on-site environment construction, but also improves the reliability of the product. It supports 5-way synchronous signal input and can be used in various occasions that require synchronous playback, such as hotels, shopping malls, conference rooms, exhibitions, studios, etc. In addition, the device also supports point-to-point input/output, allowing the LED display to display clearer images.

2. Connection Diagram

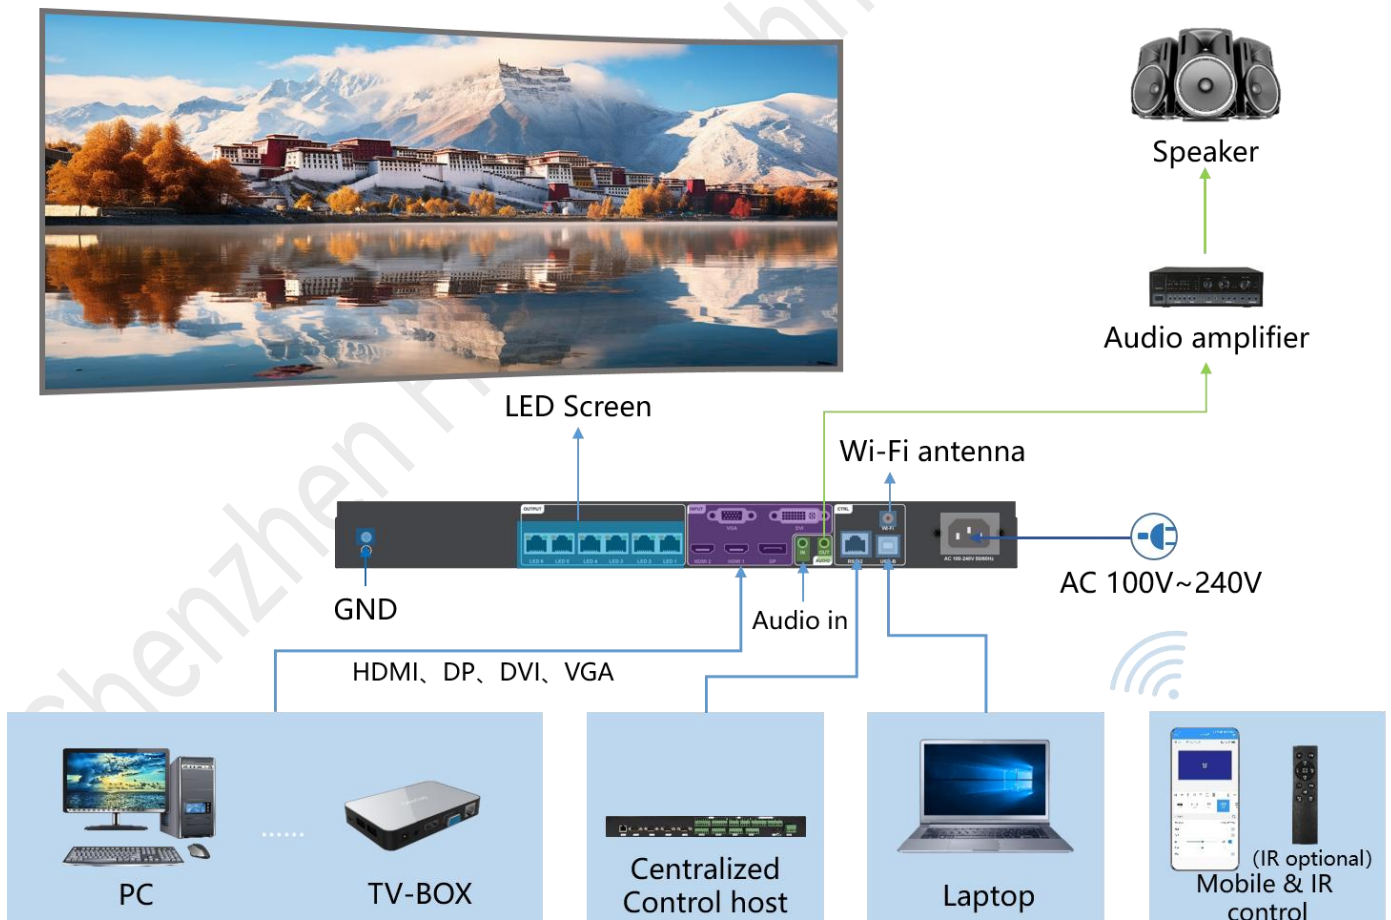

3. Product Features

Input

- Supports up to 4096*2160 @60Hz synchronous signal input ;
- Supports 2-channel HDMI, 1-channel DP, 1-channel DVI, and 1-channel VGA signal input, and can switch multiple video signals at will;
- Supports 1-way TRS 3.5mm standard two-channel audio input and HDMI/DP audio input.

Output

- Supports two-screen layout, maximum support 2×4K windows;
- Standard 6-channel Gigabit Ethernet port, cascaded with receiving card;
- The maximum control is 3.9 million pixels, the maximum horizontal support is 8192 pixels, and the maximum vertical support is 4000 pixels ;
- 1 TRS 3.5mm standard two-channel audio output.


Function

- Video signals can be switched, cropped, and scaled at will;
- Support 16 scene presets and calls ;
- Support brightness adjustment, color temperature adjustment and key lock functions ;
- Support arbitrary overlapping of network ports and non-rectangular load;
- Support point-to-point display and limited to full conversion;
- Support RS232 serial port protocol control and docking with central control equipment;

- Support Wi-Fi Station mode, AP mode, Wi-Fi Station + AP mode;
- Support mobile phone APP wireless control;
- Support infrared remote control (optional).

4. Appearance Description

Front Panel:

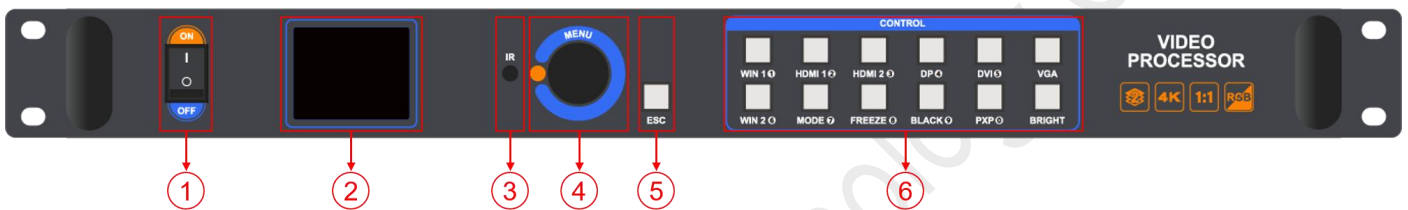


Key Description		
Serial number	button	illustrate
1	Power switch	Control AC power input
2	LCD display screen	Debug display menu, screen parameters and other information
3	IR (infrared) remote control receiver	Infrared remote control receiver
4	MENU knob	Press the knob to enter a submenu or confirm a selection Rotate the knob to select menu items or adjust parameters
5	ESC	Exit key /Back key
6	WIN1~WIN2	Select an open window Function key: The key multiplexing function is digital selection, generally used when setting the resolution

	HDMI1	Select HDMI 1 signal playback Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	HDMI2	Select HDMI 2 signal playback Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	DP	Select DP signal to play Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	DVI	Select DVI signal playback Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	VGA	Select VGA signal playback
	MODE	Quickly call up the preset mode call menu Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	FREEZE	click freeze button Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	BLACK	One-touch black screen button Function key: The key multiplexing function is digital selection,

		generally used when setting the resolution
	PXP	Quickly enter the two- screen layout menu Function key: The key multiplexing function is digital selection, generally used when setting the resolution
	BRIGHT	Quickly call out the brightness setting button

Rear Panel:

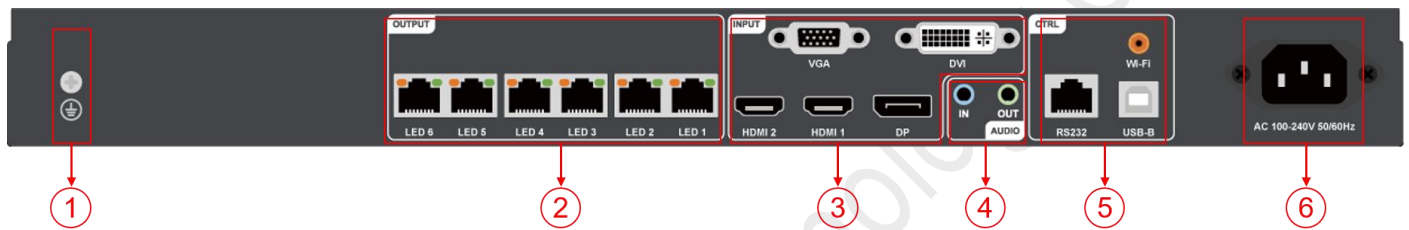

Input Interface			
Serial number	Interface Name	quantity	illustrate
3	DP1.2	1	DP input interface Interface type: DP Signal standard: DP1.2 backward compatible Resolution: VESA standard, $\geq 720 \times 480 @ 60\text{Hz}$, $\leq 4096 \times 2160 @ 60\text{Hz}$ Support audio input
	HDMI1~2	2	HDMI 2.0 input interface $\times 1$ (HDMI 1) Interface type: HDMI-A Signal standard: HDMI 2.0 backward compatible


			Resolution: VESA standard, $\geq 800 \times 600 @ 60\text{Hz}$, $\leq 4096 \times 2160 @ 60\text{Hz}$ Support audio input HDMI 1.4 input interface $\times 1$ (HDMI 2) Interface type: HDMI-A Signal standard: HDMI 1.4 backward compatible Resolution: VESA standard, $\geq 800 \times 600 @ 60\text{Hz}$, $\leq 4096 \times 2160 @ 30\text{Hz}$ Support audio input
	DVI	1	DVI input interface Interface type: DVI-I socket Signal standard: DVI1.0, HDMI1.3 backward compatible Resolution: VESA standard, $\geq 800 \times 600 @ 60\text{Hz}$, $\leq 1920 \times 1200 @ 60\text{Hz}$
	VGA	1	VGA input Interface type: DB15 socket Signal standard: R, G, B, Hsync, Vsync: 0 to 1Vpp $\pm 3\text{dB}$ (0.7V Video+0.3v Sync) 75 ohm black level: 300mV Sync-tip: 0V Resolution: VESA standard, $\geq 720 \times 480 @ 60\text{Hz}$, $\leq 1920 \times 1080 @ 60\text{Hz}$

4	AUDIO IN	1	TRS 3.5mm dual channel audio input interface
6	power supply	1	AC 100 ~ 240V 50/60Hz

Output Interface			
Serial number	Interface Name	quantity	illustrate
1	Grounding interface	1	Anti-static/leakage protection, personal safety protection and equipment normal operation protection
2	Gigabit Ethernet	6	Used for cascading receiving cards, transmitting RGB data stream, each network port controls 650,000 images, supports docking multi-function cards
4	AUDIO OUT	1	TRS 3.5mm dual-channel audio output interface Connect to an audio amplifier for high-power external speakers

Control interface			
Serial number	Interface Name	quantity	illustrate
5	RS232	1	R J45 interface, connected to the central control device
	USB-B	1	Connect to a computer for debugging the device
	Wi-Fi antenna interface	1	Connect the Wi-Fi antenna, , enhance Wi-Fi signal


* The RJ 45 to DB9 cable diagram is as follows. It is optional. If you need it, please contact sales or technical support in advance.

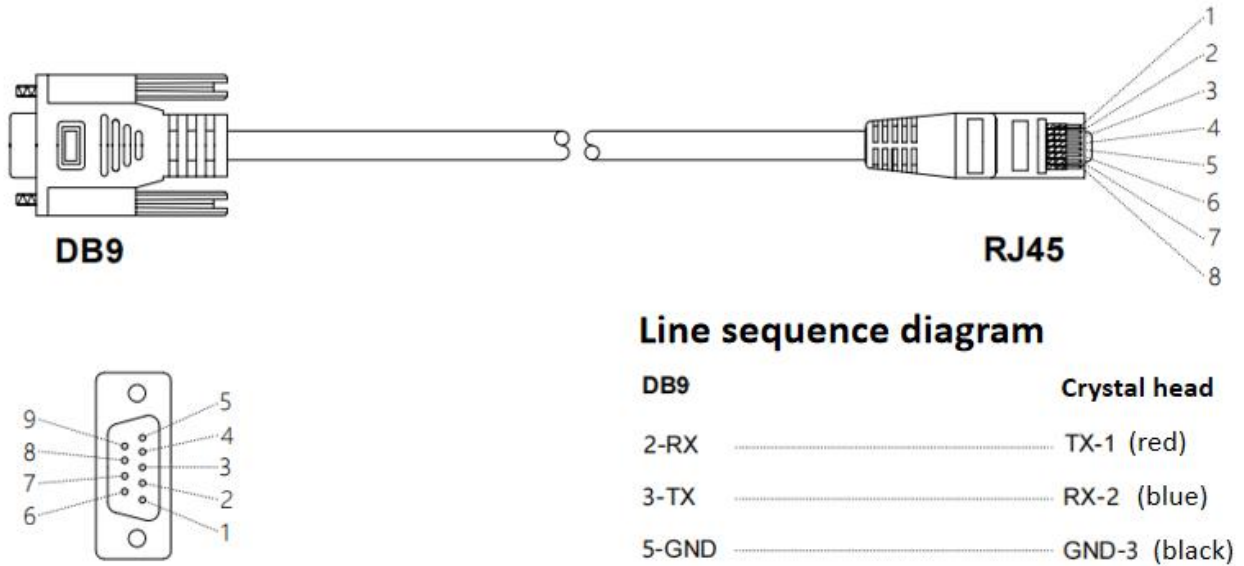

* The remote control diagram is as follows. It is optional. If you have any needs, please contact sales or technical support in advance.



5. Product size

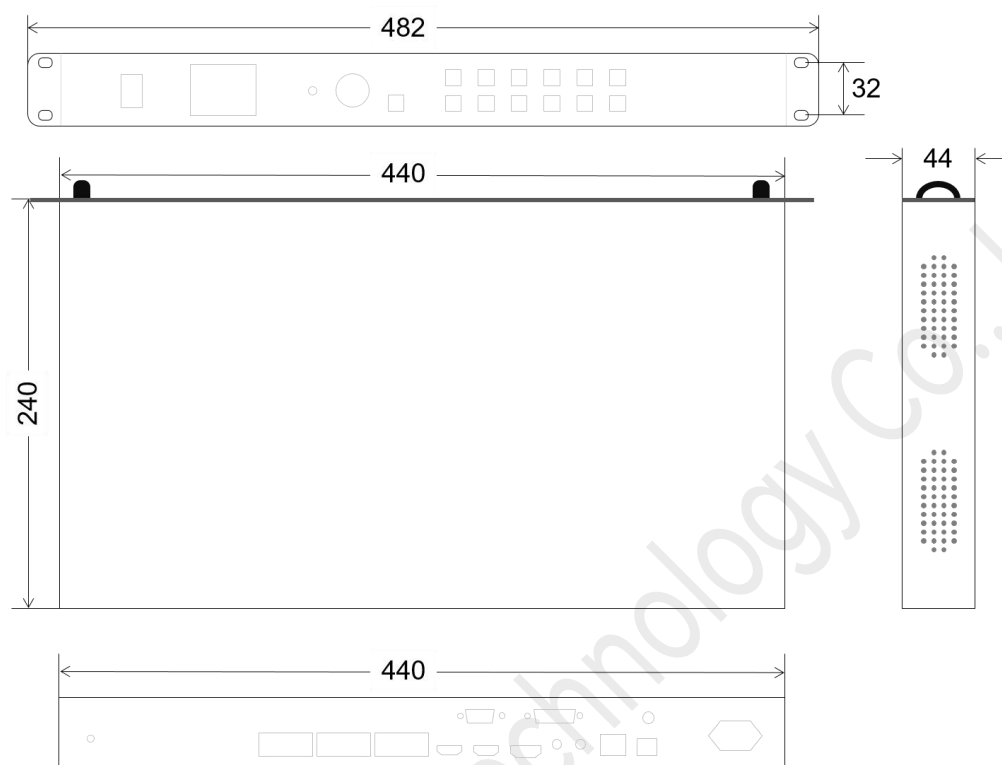

6. Basic parameters

Parameters		Parameter Value
Chassis specifications		1U Standard
Electrical specifications	power supply	AC 100~240V 50/60Hz
	Power consumption	50W
Work Environm	Operating temperature (°C)	-20 °C ~55 °C

ent	Operating humidity (RH)	20%RH~90%RH (no condensation)
Storage Environm ent	Storage temperature (°C)	-20 °C ~60 °C
	Storage humidity (RH)	10%RH~95%RH (no condensation)
Equipmen t Specificati ons	size	W×H×D/482mm×44mm×240mm
	net weight	2.9kg
Packing specificati ons	Packing size	W×H×D/ 515mm×82mm×355mm
	Packing weight	4 kg
Packing List	HD-VP620A	1PCS
	USB Cable	1PCS
	HDMI Cable	1PCS
	DVI Cable	1PCS
	Power Cable	1PCS
	Wi-Fi ANT	1PCS
	Certificate	1PCS

Illustrate:

Copyright © 2026 Shenzhen Huidu Technology Co., Ltd.

Without the authorization of Shenzhen Huidu Technology Co., Ltd., no organization or individual may imitate, copy, modify or translate part or all of the contents of this specification.

Due to factors such as production batches, production processes, and functional upgrades, our company will appropriately adjust and revise relevant pictures, text descriptions, product parameters, and other related content. In the event of the above circumstances, no further notice will be given. The product pictures in the specification are for reference only. Please refer to the actual product.

The font used in this document is HarmonyOS Sans SC.