

PRODUCT SPECIFICATION

All-in-One Video Processor

HD-VP830

V2.1

1. Overview

HD-VP830 is a new architecture 2-in-1 video processor, which integrates traditional video processor and 8-way Gigabit network port output. Support 4-channel signal interface input, supports arbitrary switching of multiple signals, three windows display, which can be used for hotels, shopping malls, conference rooms, exhibitions, studios and other scenes that need to be played simultaneously. In addition, VP830 equipped with Wi-Fi function, support mobile APP wireless operate.

2. Connection Diagram



3. Features

Input

- Support 2*HDMI, 1*DVI, 1*SDI signal input, and them support switch at will.
- 1 channel TRS 3.5mm audio input and HDMI audio input.

Output


- Standard 8-way Gigabit network output, direct cascade receiving card.
- The maximum loading capacity is 5.2 million pixels, the maximum width is 8192 pixels, and the maximum high is 4096 pixels.
- 1 channel TRS 3.5mm audio output.

Function

- Equipped with Wi-Fi, support mobile APP wireless operate.
- Support IR wireless control.
- Support brightness setting, Key lock function.
- Preset saving and calling of scenarios, support saving 8 user templates.
- Support RS232 centralized management.
- Three-windows display, Support PIP and POP function.

4. Appearance

Front panel:

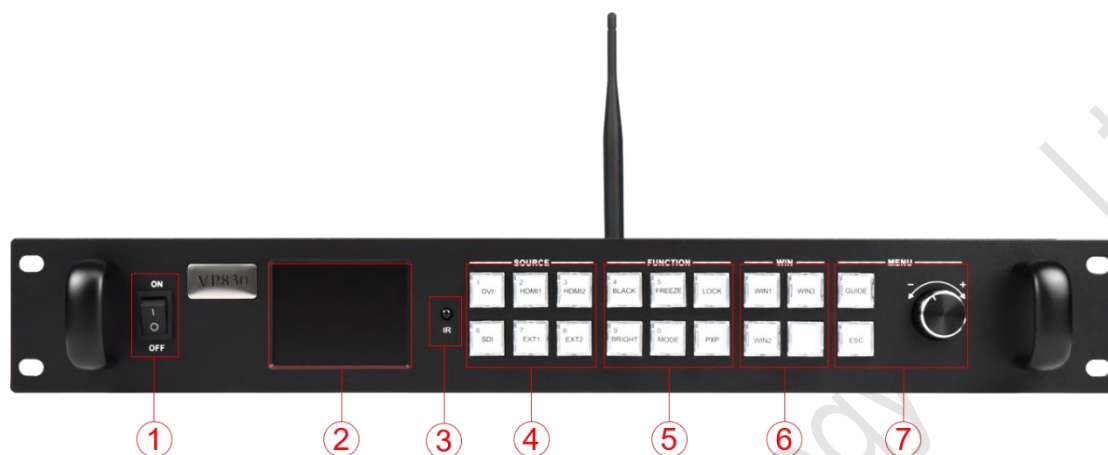


Key Description

No.	Key	Description
1	Switch	AC power input switch
2	LCD screen	Display menu, screen parameters and other information, used for debug device
3	IR receiver	Switch signal source, brightness setting, volume adjustment and other functions
4	SOURCE	Input Source Select keypad, 4 input source port selection buttons, corresponding to the input interface identification on the back panel.
4	FUNCTION	Function keys, the key multiplexing function is digital selection, generally used when setting the resolution. BLACK: when you press BLACK and its indicator will be on, the output screen will be in a black state.

		BRIGHT: Quickly swap out the shortcut keys of the brightness adjustment menu. MODE: Quickly pop up the preset mode call menu. PXP: Quickly enter the dual picture layout menu FREEZE: Shortcut key for screen freeze. LOCK: Quickly lock the keys to prevent miss operation.
5	WIN	[WIN1]- [WIN3] Button: You can press it to add 1~2 window display, and its indicator means the currently selected window.
6	MENU	Short press the knob [OK] key: it means to enter the main menu or input confirmation. Turn the knob clockwise to increase or the next option, counterclockwise to decrease or the previous option. GUIDE: can quickly switch out the "smart navigation" setting interface. Return key ESC: means to exit the current operation or option.

Rear Panel:

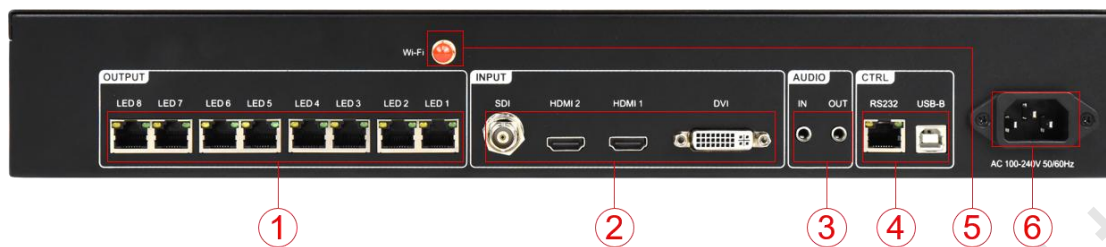


Input interface

No.	Name	quantity	Description
2	HDMI	2	HDMI input interface Interface form: HDMI-A Signal standard: HDMI 1.3 backward compatible Resolution: VESA standard, $\leq 1920 \times 1080 @ 60\text{Hz}$ Support audio input
	DVI	1	Interface form: DVI-I socket Signal standard: DVI1.0 Resolution: VESA standard, PC to 1920×1080 , HD to 1080p
	SDI	1	Interface form: BNC Signal standard: SD-SDI, HD-SDI, 3G-SDI Resolution: VESA standard, $\leq 1920 \times 1080 @ 60\text{Hz}$
3	AUDIO IN	1	TRS 3.5mm audio input
6	Power	1	AC power interface 100-240V, 50/60Hz

Output interface			
No.	Name	quantity	Description
1	LAN output	8	Gigabit Ethernet port Transmission speed 1Gbps, used for cascading receiving cards, transmitting RGB data stream. One Gigabit Ethernet port support loading capacity 655,360 pixels.
3	AUDIO OUT	1	TRS 3.5mm dual channel audio output port Connect audio power amplifier for high-power audio external amplifier

Control interface			
No.	Name	quantity	Description
4	USB-B	1	Connect to the PC, used for debug LED controller
	RS232		Connect central control equipment for centralized control
5	Wi-Fi	1	Connect to Wi-Fi antenna to enhance wireless signal

5. Dimension

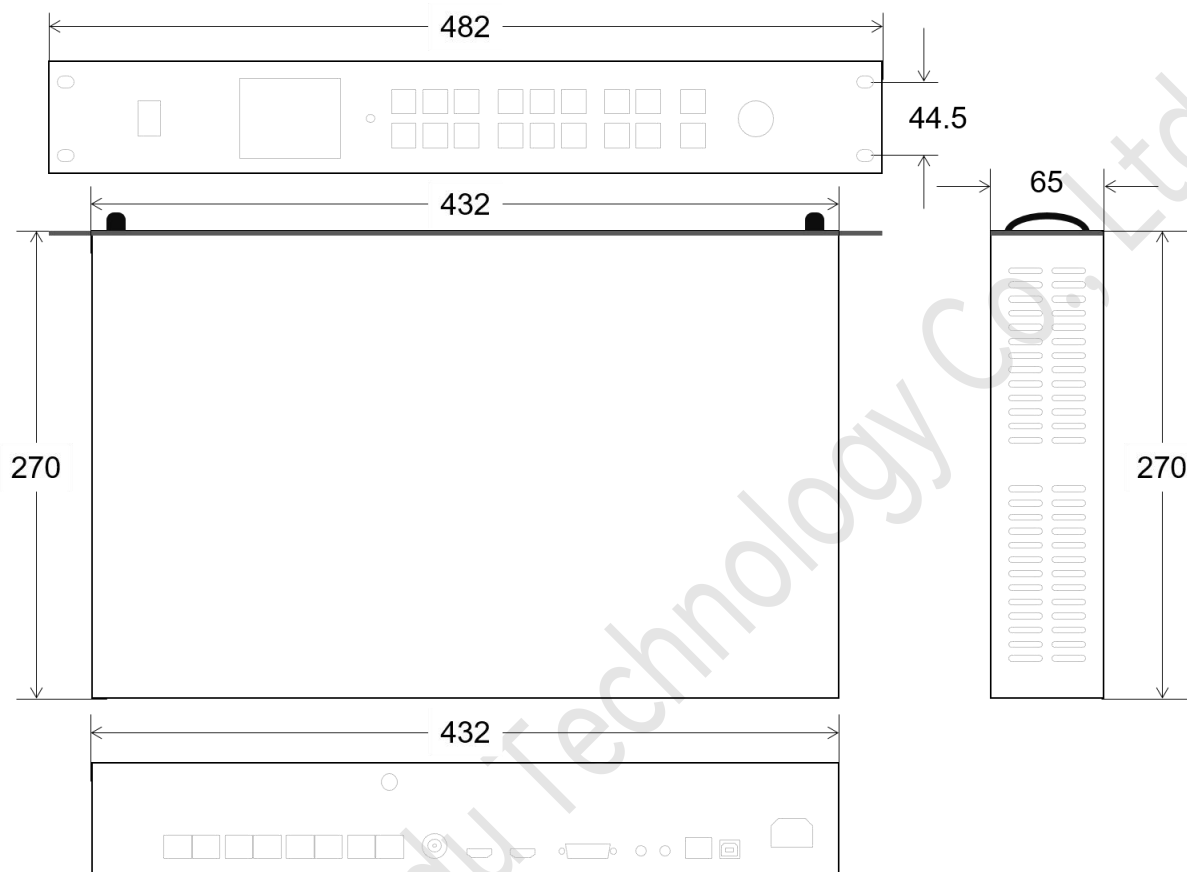

6. Basic Parameters

Parameters		Parameter Value
Chassis specifications		1.5U
Electrical specifications	power supply	AC 100~240V 50/60Hz
	Power consumption	50W
Work Environment	Operating temperature (°C)	-20 °C ~ 55 °C
	Operating humidity (RH)	20%RH~90%RH (no condensation)
Storage environment	Storage temperature (°C)	-20 °C ~60 °C
	Storage humidity (RH)	10%RH~95%RH (no condensation)
Equipment Specifications	size	W×H×D/482mm×65mm×270mm
	Net weight	3.35kg
Packing specifications	Packing size	W×H×D/515mm×120mm×370mm
	Packing weight	4.5 kg
Packing List	HD-VP830	1PCS
	Power Cable	1PCS
	USB Cable	1PCS
	HDMI Cable	1PCS
	DVI Cable	1PCS
	Wi-Fi ANT	1PCS
	Certificate	1PCS

Illustrate:

Copyright © 2026 Shenzhen Huidu Technology Co., Ltd.

Without the authorization of Shenzhen Huidu Technology Co., Ltd., no organization or individual may imitate, copy, modify or translate part or all of the contents of this specification.

Due to factors such as production batches, production processes, and functional upgrades, our company will appropriately adjust and revise relevant pictures, text descriptions, product parameters, and other related content. In the event of the above circumstances, no further notice will be given. The product pictures in the specification are for reference only. Please refer to the actual product.

The font used in this document is HarmonyOS Sans SC.